


SPECIFICATION FOR RECEIVING CARD LS-V301(50)

Version	Date	Reason
V1.0	21/04/2017	Document

Hardware

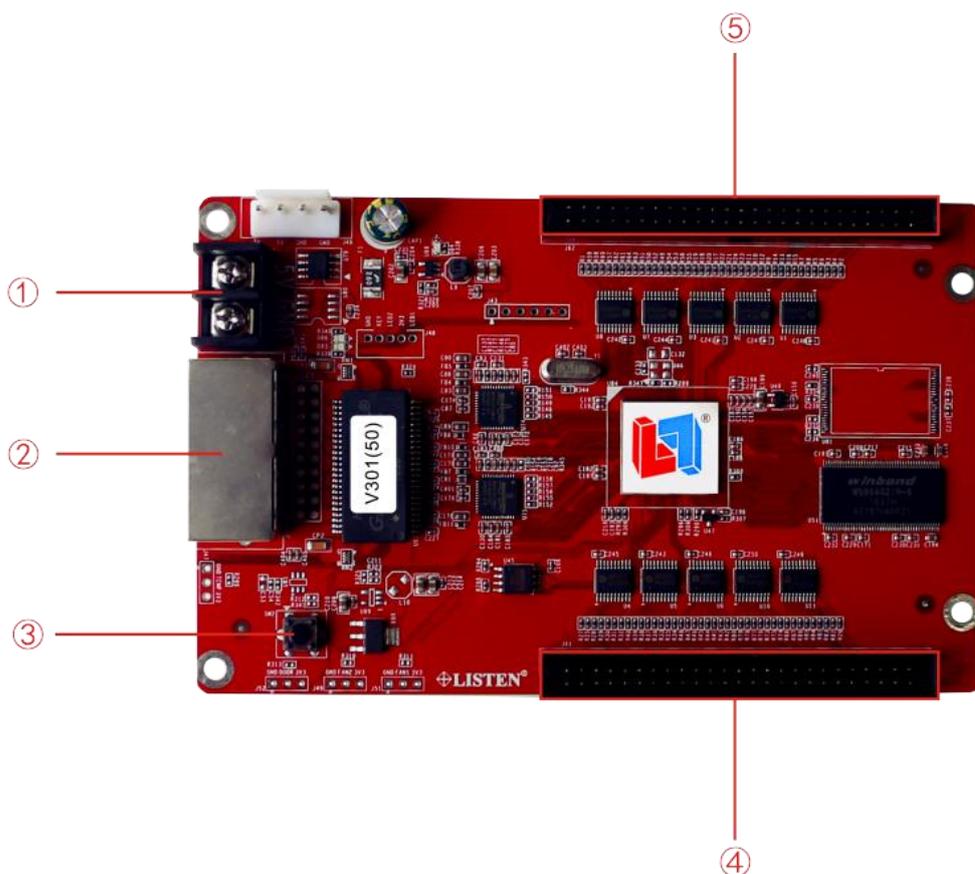


①	5V Power Port
②	Giga-Bit Interface
③	Test Key
④	50 pin output port 1
⑤	50 pin output port 1

Product Parameters

Product Type	Full-color sync receiving card
Scan	Support 1/32, compatible with constant voltage/ constant current/ bistable latch/ high refresh chips
Control Range	256*128(4 scan) 128*256(16 scan) 128*512(32 scan)
On-board Interface	2*50PIN
Grey Level	2~65536
Refresh Rate	Maximum 4KHz~16KHz
SI rate	1MHz~31.25MHz
Data	20 full-color signal
Cascade cards	255
Brightness Loss	< 10%
Other attributes	One key to switch, power source protection
Partner Product	LS-V9、LS-V9(BOX)
Working Temperature	-40°C - 85°C

Dimensional Drawing

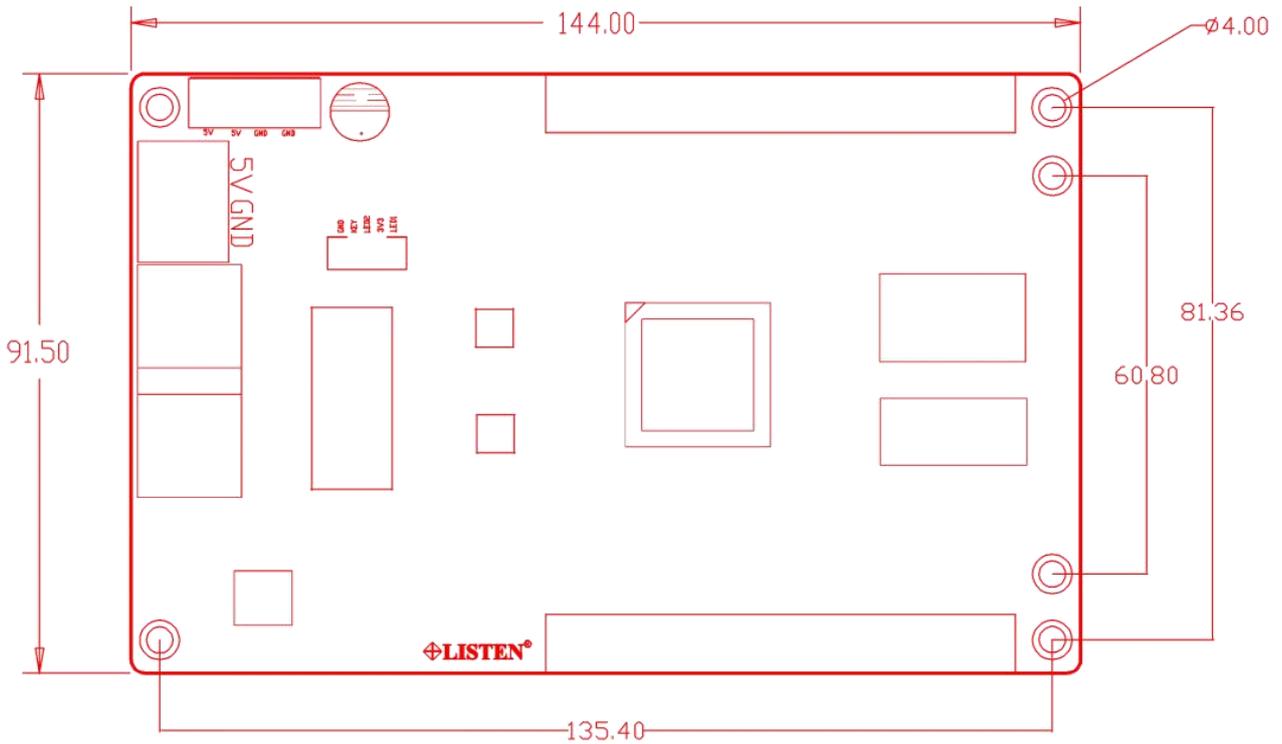

Connection Instruction

LS-V9 can connect many receiving cards. It can be controlled wireless without computer, but also be connected by capturing the screen via computer

Cascade drawing

