


SPECIFICATION FOR RECEIVING CARD

LS-V301(75E)

Version	Date	Reason
V1.0	21/042017	Document



Hardware

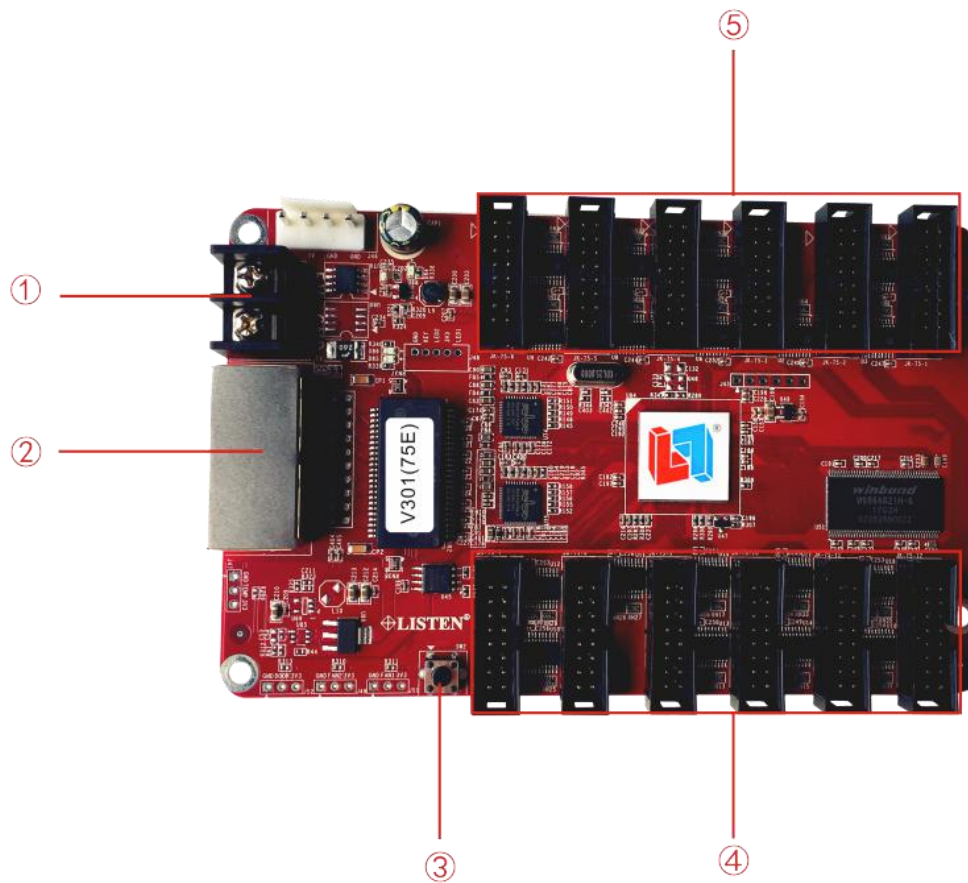


①	5V Power Port
②	Giga-bit Interface
③	Test Key
④	HUB75 Interface
⑤	HUB75E Interface

Product Parameters

Product Type	Full-color sync receiving card
Scan type	Support 1/32, compatible with constant voltage/ constant current/ bistable latch/ high refresh chips
Control Range	256*192(4 scan) 128*384(16scan) 128*768(32scan)
On-board Interface	12*75E
Grey Level	2~65536
Refresh Rate	Maximum 4KHz~16KHz
SI Interface	1MHz~31.25MHz
Data	24full-color signals
Cascade Cards	255
Brightness Loss	< 10%
Other Attributes	One key to switch, power source protection
Partner Product	LS-V9、LS-V9(BOX)
Working Temperature	-40℃- 85℃

Dimensional Drawing

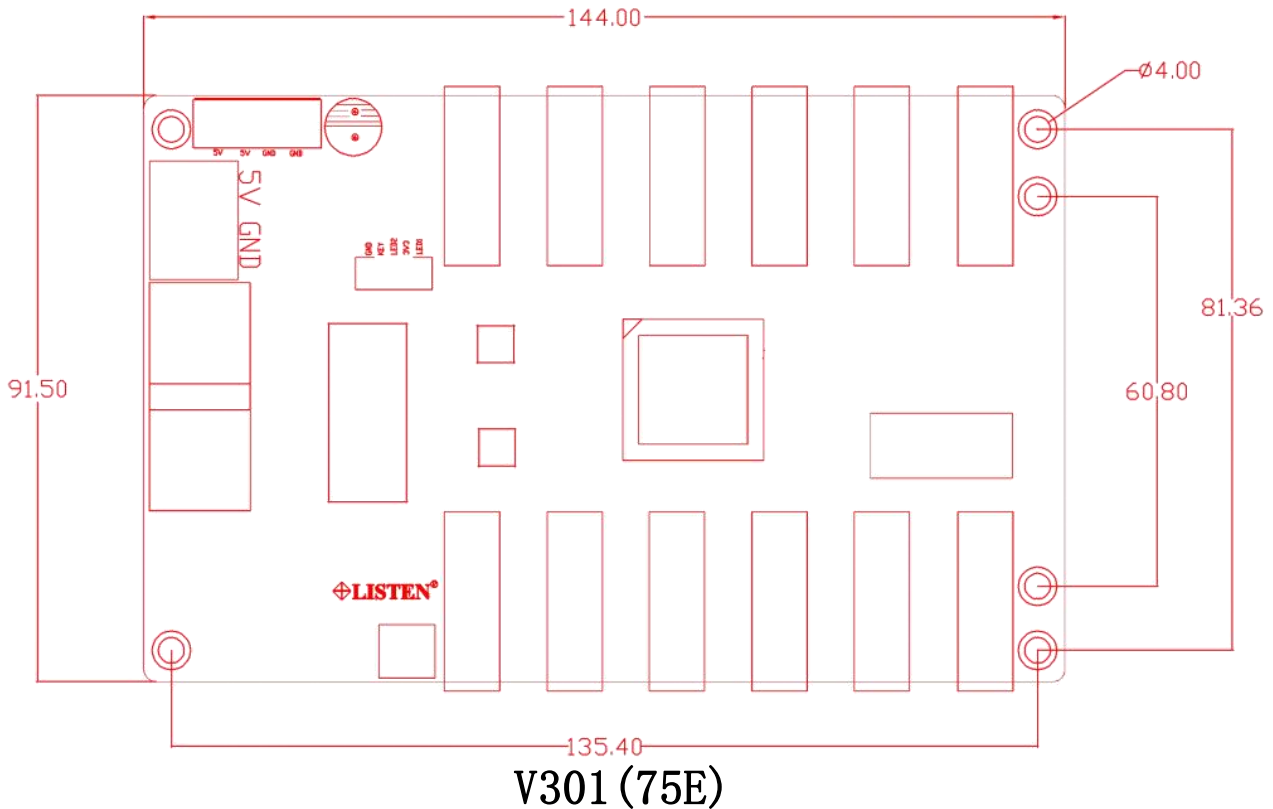

Connection Instruction

LS-V9 can connect many receiving cards. It can be controlled wireless without computer, but also be connected by capturing the screen via computer

Cascade drawing

