


SPECIFICATION FOR LS-XOU

Version	Date	Reason
V1.00	11/042017	document

Hardware

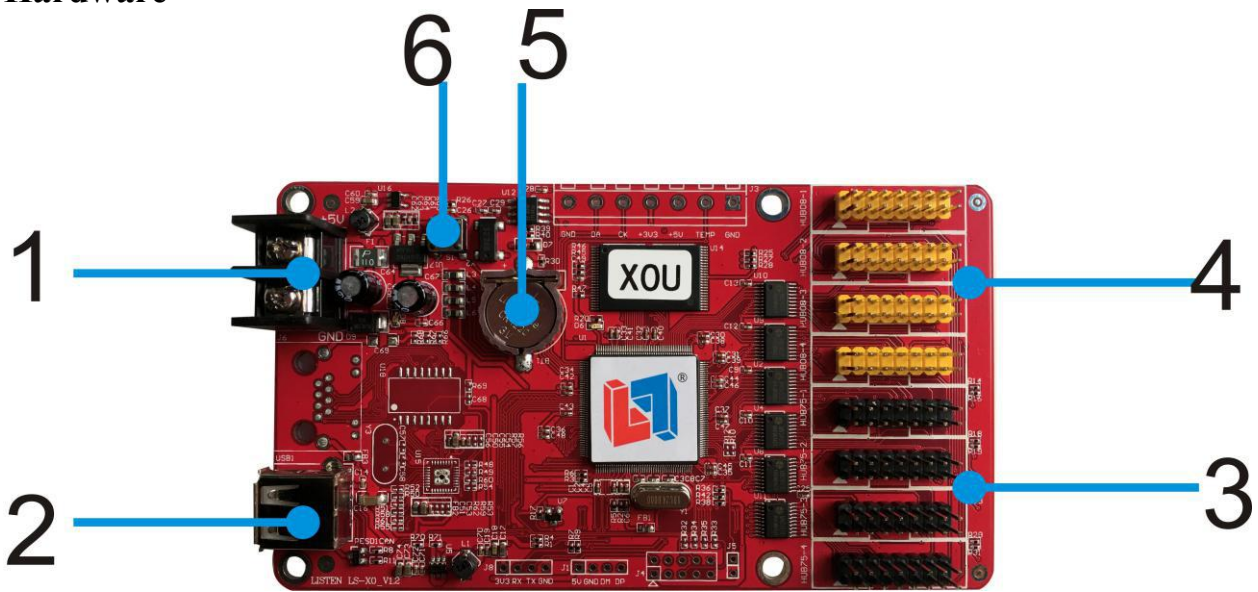

Number	Interface Name	Description
1	5V Power Port	Wide voltage, 4.5V
2	USB	USB
3	HUB75 Port	4*75
4	HUB08 Port	4*08
5	RTC Button battery	RTC Power, Voltage 3.5V
6	Test Key	Test

Product Parameters

Range	Suitable for all full color door-header displays
Control	512*64 256*128
Grey Level	256
Scan	Support 1/16, compatible with mien chips
Video Format	Support AVI、WMV、RMVB、MP4、3GP、ASF、MPG、FLV、F4V、MKV、MOV、DAT、VOB、TRP、TS、WEBM etc.
Image Format	Support BMP、GIF、JPG、JPEG、PNG、GIF etc.
Text	Support word-editing and image-insertion, directly import word, text, rtf, html etc.
Clock	Catalog clock, digit clock and dial clock
Storage	128MB
Communication type	100M net port and USB port, convey videos via USB Disk
Software Function	Cluster management/ programmes edition/ multi-area display/ multi-language version
Area Type	Text & image/ subtitle/ animation/ time/ clock/ count up&down timing/ temperature/ temperature and humidity
Display Port	4*75*8 , 4*08*4
Sensor	Temperature/ temperature and humidity
Brightness	16 level, automatically turn lights up and down
Voltage	3.5V-6V
Max Power	≤ 2.5W
Temperature	-40℃ ~ 85℃
Software	LED Player 6.0
Description	Build in so many colorful backgrounds& words

Dimensional Drawing

