


# Interface Specifier

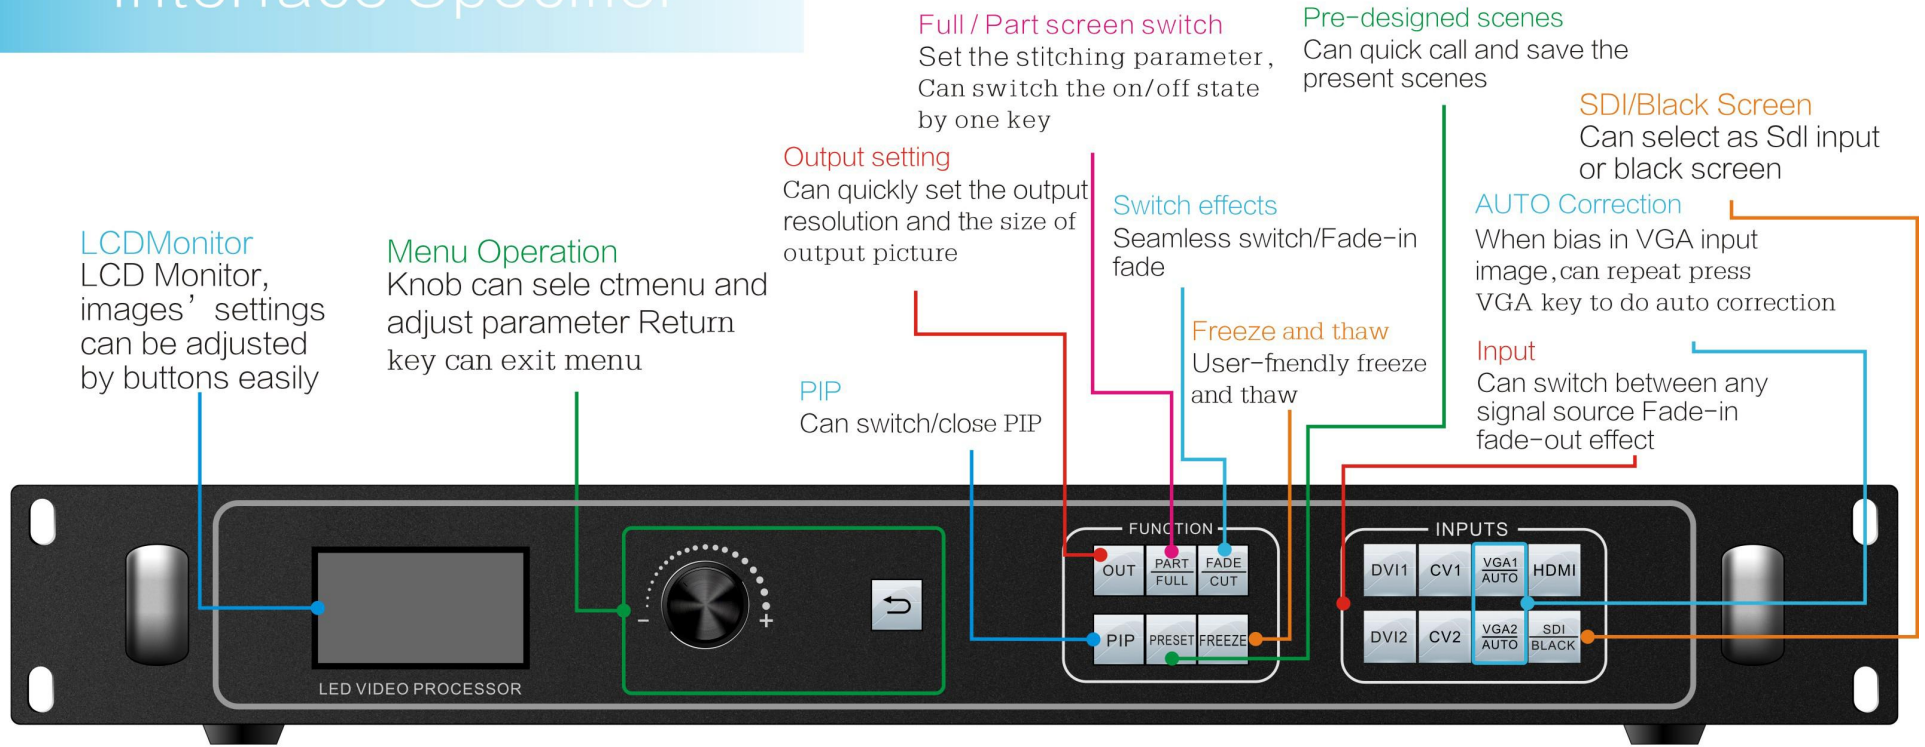

**LCD Monitor**  
LCD Monitor, images' settings can be adjusted by buttons easily

**Menu Operation**  
Knob can select menu and adjust parameter Return key can exit menu

**Output setting**  
Can quickly set the output resolution and the size of output picture

**PIP**  
Can switch/close PIP

**Full / Part screen switch**  
Set the stitching parameter, Can switch the on/off state by one key

**Switch effects**  
Seamless switch/Fade-in fade

**Freeze and thaw**  
User-friendly freeze and thaw


**Pre-designed scenes**  
Can quick call and save the present scenes

**SDI/Black Screen**  
Can select as Sdi input or black screen

**AUTO Correction**  
When bias in VGA input image, can repeat press VGA key to do auto correction

**Input**  
Can switch between any signal source Fade-in fade-out effect

Face

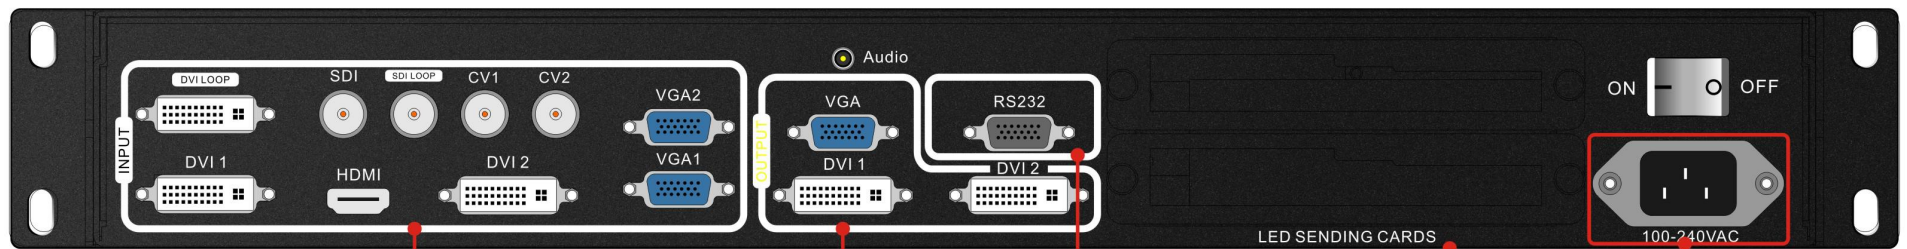

**Input signal source Interface**  
Each signal interface related to one input signal, plug and play

**Signal source Output**  
Used for output data and effect

**Test Interface**  
Used for inner testing

**Sending card**  
Support 2pcs sending cards  
Compatible all LED Sending cards

**Power Supply**

Back



# LS-VP6000 CONNECTION SKETCH

