



| | | |
|--|--|--|
| | | |
| | | |

HARDWARE

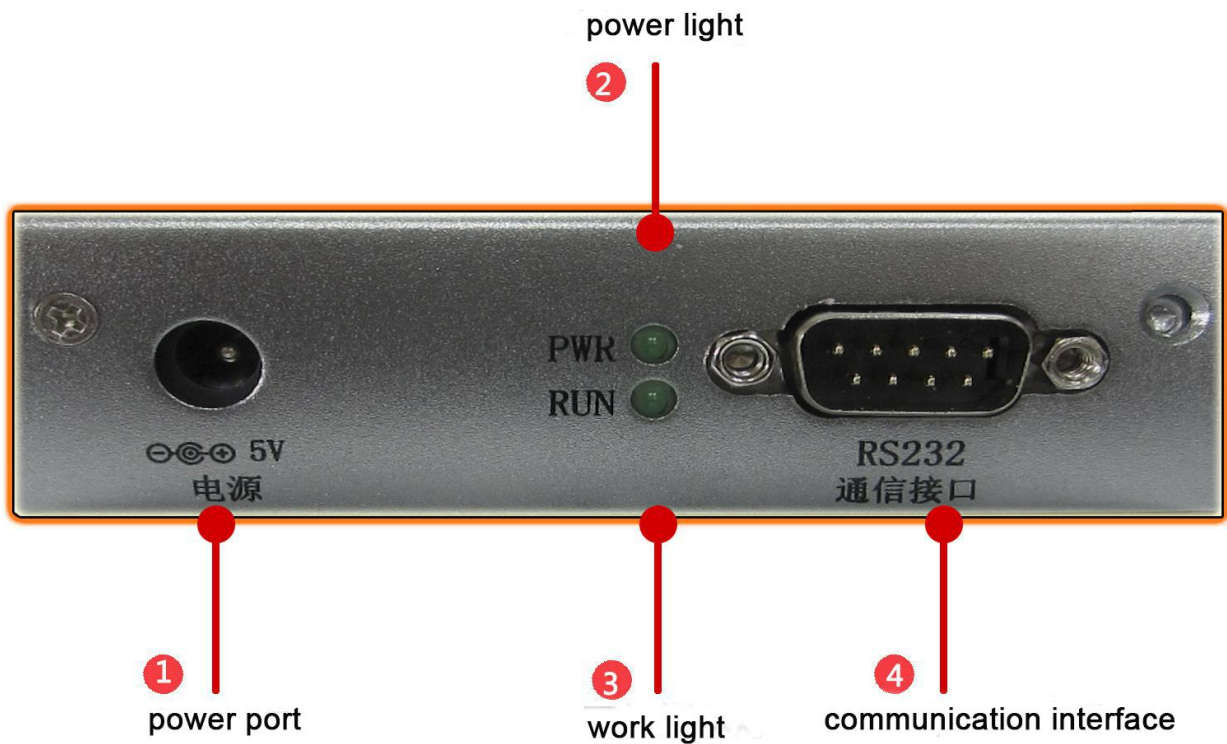

- 1、 Power port: +5V power input.
- 2、 power light: when power is on, the power light (PWR) is on.
- 3、 Work light : when system is normal, the light(RUN) flickers.
- 4、 Communication port of player: connect serial cable to player(2.3.5) .

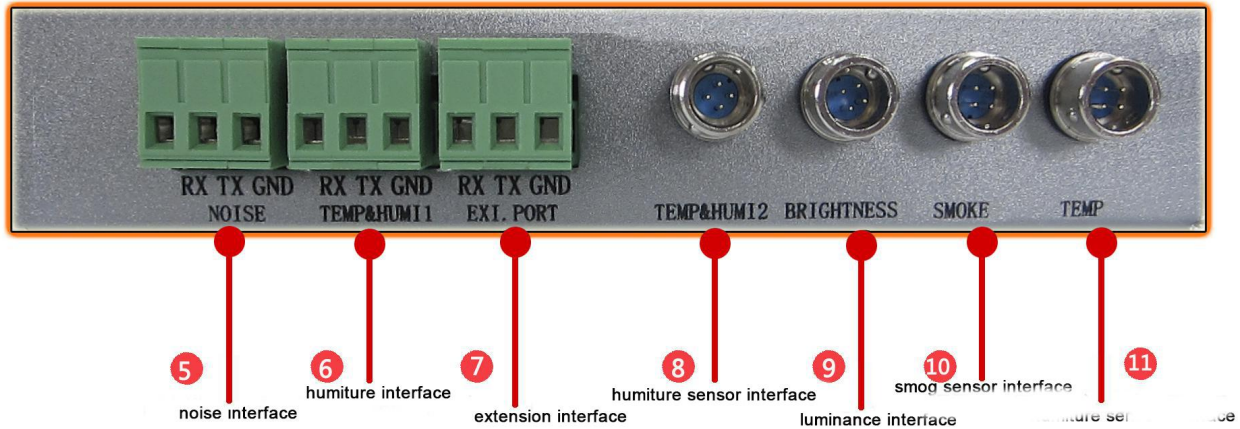

5、 Noise interface: connect with noise module LS-F111 to collect environment noise

6、 Decibel range: 35dB~130dB (A)40dB~130dB (C) 。

6、 Humiture inteface: connect with humiture module LS-F101 to collect environment temperature and humidityetc.

Range :-40℃~120℃ 及 0~100%RH/-10℃~60℃ 及 0~100%RH。

7、 Extension interface: secondary development for special equipment

8、 Humiture sensor interface: connect with humiture sensor to collect environment temperature and humidity etc. Range :-40℃-123.8℃ 及 0~100%RH。

9、 Luminance transduce inteface : connect with luminance transducer LS-F211 to collect environment brightbess to adjust brightness automatically.

10、 Smog sensor interface: connect smog detector to sense smog.

11、 temperature sensor: connect temperature sensor LS-F202 to collect environment temperature

Range : -55℃~+125℃ , original test temperature is 0.5℃ 。

